

250A BATTERY CHARGER

Part Number	Input Power	Rated Output Current / Duty Cycle	Input Current at Rated Output	Charging Voltages	Dimensions (H X W X D)	Shipping Weight	Agency
K3150-1	120/1/60	60A (6,12V) / 40A, 2A (12V) / 250A (12V, 5 sec. on, 200 off) / 185A (6V, 5 sec. on, 200 off)	12A (43A Start)	6 & 12 volt	Ctn: 23½" X 18" X 15" Unit: 36¾" X 16½" X 13"	44 lbs.	cULus

6 & 12V 60/40/2/250 Amp Commercial Charger with Test

FEATURES


- **250 amp 12v engine start** helps start stubborn motors.
- **60 amp high / 40 amp medium / 2 amp low** 12v charge settings.
- **185 amp start / 60 amp high** 6v charge settings
- **Test feature** identifies battery and alternator problems, indicates battery state of charge.
- **Charges 6 & 12 volt** maintenance free, conventional wet, deep cycle, AGM, and gel batteries used in cars, trucks, farm equipment, RV, boats and commercial applications.
- **Charges automotive batteries in 1 to 3 hours.**
- **Large, easy to read 3" Ammeter and Voltmeter** help monitor charging progress and identify problem battery conditions.
- **Two hour timer with hold position.**
- **Heavy duty insulated clamps** grip securely on all batteries and safely store on clamp holders.
- **Heavy duty semi pneumatic wheels** and chrome handle.
- **Six foot, 6 gauge copper output cables.**
- 5 year limited warranty on transformer & rectifier, 2 years on unit, and 1 year on cables.



APPLICATIONS



250A BATTERY CHARGER

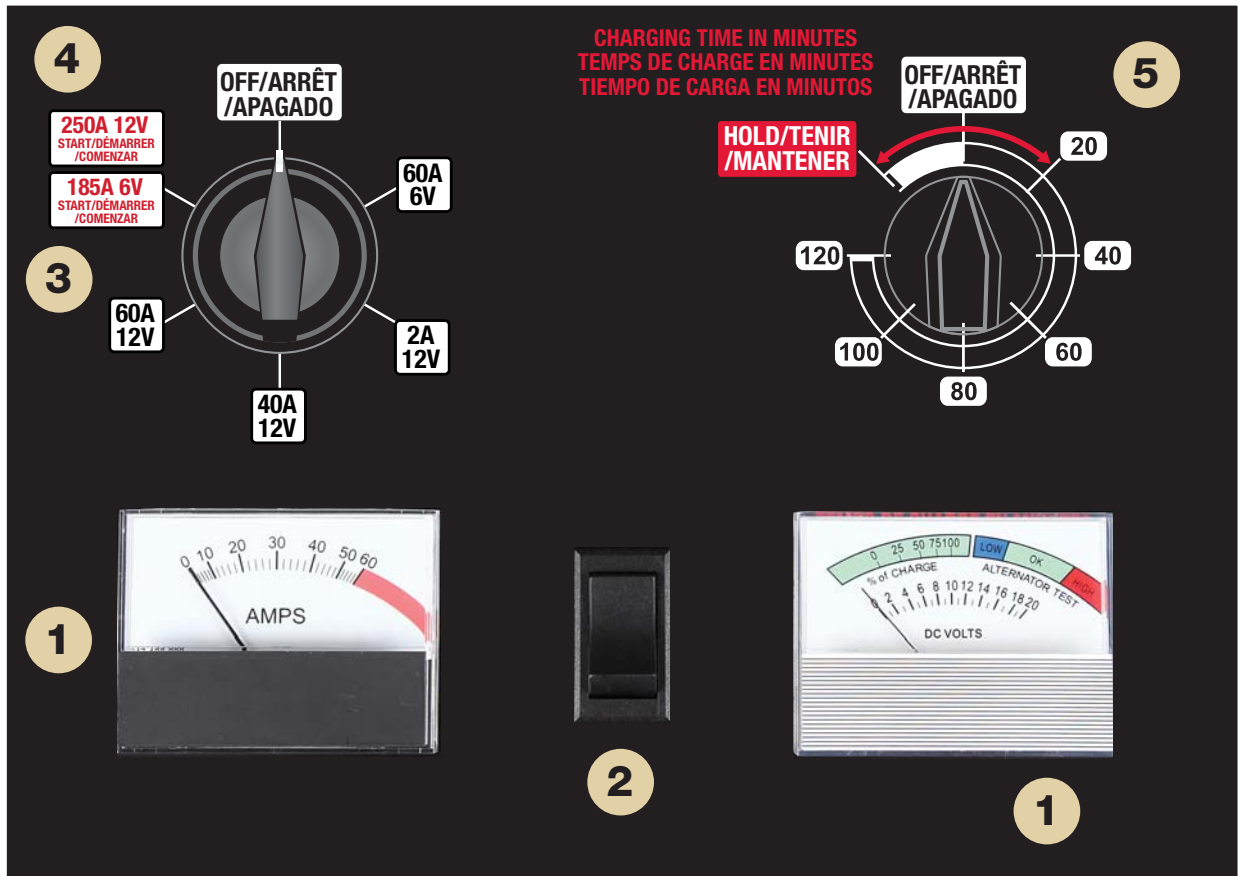

- 1. Large, easy to read 3" Ammeter and Voltmeter help monitor charging progress and identify problem battery conditions.
- 2. Test feature identifies 12V battery and alternator problems, indicates battery state of charge.

- 3. 185 amp 6v engine start helps start stubborn motors
- 4. 250 amp 12v engine start helps start stubborn motors.
- 5. 2 hour timer with hold position for longer charges

UNIT UPC CODE



0 15082 54922 4

