

225A BATTERY CHARGER

Part Number	Input Power	Rated Output Current / Duty Cycle	Input Current at Rated Output	Charging Voltages	Dimensions (H X W X D)	Shipping Weight	Agency
K3151-1	120/1/60	60A (6,12V) / 40A (12V) / 30A (24V) 225A (12V, 5 sec. on, 175 off) / 160A (6V, 5 sec. on, 175 off)	12A (35A Start)	6, 12 & 24 volt	Ctn: 23½" X 18" X 15" Unit: 36¾" X 16½" X 13"	55 lbs.	cULus


6, 12 & 24 volt 60/40/225 Amp Commercial Charger

FEATURES


- **225 amp 12v engine start** helps start stubborn motors.
- **160 amp start / 60 amp high 6v** charge settings.
- **60 amp high / 40 amp medium 12v** charge settings.
- **30 amp medium 24v** charge setting.
- **Charges 6, 12 & 24 volt** maintenance free, conventional wet, deep cycle, AGM, and gel batteries used in cars, trucks, farm equipment, RV, boats and commercial applications.
- **Charges automotive batteries in 1 to 3 hours.**
- **Large, easy to read 3" Ammeter and Voltmeter** help monitor charging progress and identify problem battery conditions.
- **Two hour timer** with hold position.
- **Heavy duty insulated clamps** grip securely on all batteries and safely store on clamp holders.
- **Heavy duty semi pneumatic wheels** and chrome handle.
- **Six-foot, 6 gauge copper output cables.**
- 5 year limited warranty on transformer & rectifier, 2 years on unit, and 1 year on cables.



APPLICATIONS



225A BATTERY CHARGER

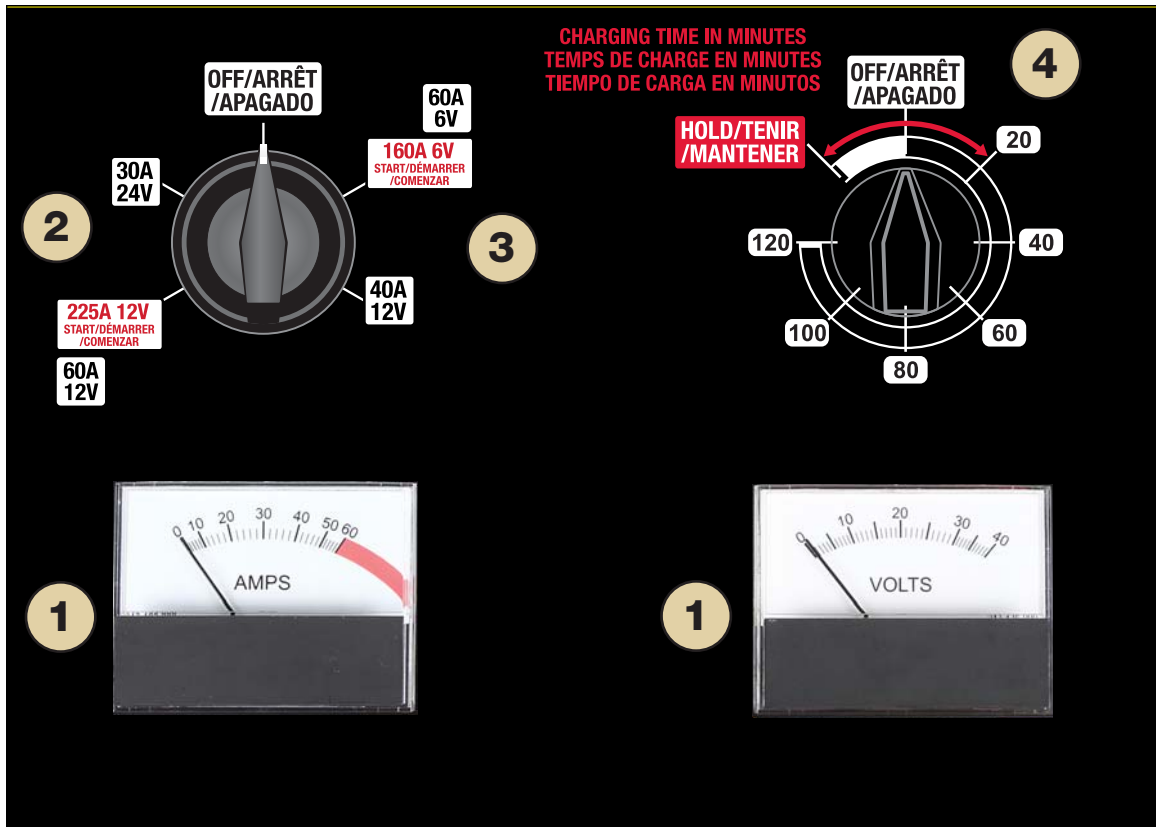

- 1. Large, easy to read 3" Ammeter and Voltmeter help monitor charging progress and identify problem battery conditions.
- 2. 225 amp 12v engine start helps start stubborn motors.
- 3. 160 amp 6v engine start helps start stubborn motors.
- 4. 2 hour timer with hold position for longer charges

UNIT UPC CODE

